

This Page Is Inserted by IFW Operations
and is not a part of the Official Record

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

IMAGES ARE BEST AVAILABLE COPY.

**As rescanning documents *will not* correct images,
please do not report the images to the
Image Problem Mailbox.**

THIS PAGE BLANK (USPTO)

(19)



Europäisches Patentamt
European Patent Office
Office européen des brevets

(11) Publication number:

0 330 261
A2

(12)

EUROPEAN PATENT APPLICATION

(21) Application number: 89200355.9

(51) Int. Cl.4: **C11D 3/00** , **C11D 3/20** ,
C07C 93/18 , **D06M 13/34** ,
D06M 13/46

(22) Date of filing: 15.02.89

114-6
A 12

(30) Priority: 25.02.88 US 160380

(43) Date of publication of application:
30.08.89 Bulletin 89/35

(84) Designated Contracting States:
AT BE CH DE FR GB IT LI LU NL

(71) Applicant: **THE PROCTER & GAMBLE
COMPANY**
One Procter & Gamble Plaza
Cincinnati Ohio 45202(US)


(72) Inventor: **Hardy, Frederick Edward**
8 Woodend Darras Hall
Ponteland Northumberland NE20 9ES(GB)
Inventor: **Walley, Darlene Rose**
363 McAlpin
Cincinnati Ohio 45220(US)

(74) Representative: **Canonici, Jean-Jacques et al**
Procter & Gamble European Technical
Center N.V. Temselaan 100
B-1820 Strombeek-Bever(BE)

2 US 4,840,738

(54) Stable biodegradable fabric softening compositions containing 2-hydroxypropyl monoester quaternized ammonium salts.

(57) Shelf-stable biodegradable fabric softening compositions are provided comprising mixtures of a quaternized ester-ammonium softening compound having the formula



and mixtures thereof, wherein each R substituent is independently selected from C₁-C₆ alkyl, alkenyl or hydroxyalkyl groups, R¹ is a C₁₄-C₂₂ hydrocarbyl group, R² is a C₁₃-C₂₁ hydrocarbyl group, and A⁻ is a softener compatible anion; and a liquid carrier. These biodegradable compositions have improved product stability and dispersability, as well as excellent fabric softening characteristics.

EP 0 330 261 A2

**STABLE BIODEGRADABLE FABRIC SOFTENING COMPOSITIONS CONTAINING 2-HYDROXYPROPYL MON-
OESTER QUATERNIZED AMMONIUM SALTS**TECHNICAL FIELD

The present invention relates to textile treatment compositions. In particular, it relates to textile
5 treatment compositions for use in the rinse cycle of a textile laundering operation to provide fabric
softening/static control benefits, the compositions being characterized by excellent storage stability and
viscosity characteristics, as well as biodegradability. The compositions herein can also be used to treat
fabrics in hot air clothes dryers and in through-the-wash compositions, as well as in hair conditioner
compositions.

10

BACKGROUND OF THE INVENTION

15 Textile treatment compositions suitable for providing fabric softening and static control benefits during
laundering are well-known in the art and have found wide-scale commercial application. Conventionally,
rinse-added fabric softening compositions contain, as the active softening component, substantially water-
insoluble cationic materials having two long alkyl chains. Typical of such materials are di-tallow di-methyl
ammonium chloride and imidazolinium compounds substituted with two stearyl groups. These materials are
20 normally prepared in the form of a dispersion in water. It is generally not possible to prepare such aqueous
dispersions with more than about 10% of cationic materials without encountering intractable problems of
product viscosity and stability, especially after storage at elevated temperatures, such that the compositions
are unpourable and have inadequate dispensing and dissolving characteristics in rinse water. This physical
restriction on softener concentration naturally limits the level of softening performance achievable without
25 using excessive amounts of product, and also adds substantially to the costs of distribution and packaging.
Accordingly, it would be highly desirable to prepare physically-acceptable textile treatment compositions
containing much higher levels of water-insoluble cationic softener materials.

It would also be desirable to have fabric softening compositions which are storage-stable, and also
which are biodegradable. However, materials which may be biodegradable are often difficult to formulate as
30 stable liquid compositions.

It is an object of this invention to provide a storage-stable, biodegradable fabric softening composition.
It is a further object to provide such materials in the form of liquid products, including concentrates, suitable
for use in the rinse cycle of a textile laundering operation, and in sheet form for use in clothes dryers.
These and other objects are obtained using the present invention, as will be seen from the following
35 disclosure.

Cationic softener materials are normally supplied by the manufacturer in the form of a slurry containing
about 70%-80% of active material in an organic liquid such as isopropanol, sometimes containing a minor
amount of water (up to about 10%). Retail fabric softening compositions are then prepared by dispersion of
the softener slurry in warm water under carefully controlled conditions. The physical form and dispersibility
40 constraints of these industrial concentrates, however, are such as to preclude their direct use by the
domestic consumer; indeed, they can pose severe processing problems even for the industrial supplier of
retail fabric softening compositions.

The use of various quaternized ester-amines as cationic fabric softening agents is known in the art. See,
for example, U.S. Patent 4,339,391, Hoffmann, et al., issued July 13, 1982, for a series of quaternized ester-
45 amines which function as fabric softeners. Various quaternized ester-amines are commercially available
under the tradenames SYNPROLAM FS from ICI and REWOQUAT from REWO. Similarly, methods for
preparing various quaternized ester-amine compounds are known in the art. See, for example, U.S. Patent
3,342,840, Sobolev, issued September 19, 1967, U.S. Patent 3,872,138, Ogatu, issued March 18, 1975, and
Japanese Laid Open Publication 49-1510, assigned to Gosei Chem. Ind. Co., published January 9, 1974.

50 Unfortunately, although quaternized ester-amines are believed to be rapidly biodegradable, they are
more subject to hydrolysis than are conventional cationic softening agents (e.g., ditallow dimethyl ammo-
nium chloride and analogs thereof) and hence can encounter hydrolytic stability problems upon prolonged
shelf storage. The product stability and viscosity problems becoming increasingly more unmanageable in
concentrated aqueous dispersions.

Various solutions to the problem of preparing concentrated fabric softening compositions suitable for consumer use have been addressed in the art. See, for example, U.S. Patents 4,426,299, issued January 17, 1984, and 4,401,578, issued August 30, 1983, Verbruggen, which relate to paraffin, fatty acids and ester extenders in softener concentrates as viscosity control agents.

5 European Patent 0,018,039, Clint, et al., issued March 7, 1984, relates to hydrocarbons plus soluble cationic or nonionic surfactants in softener concentrates to improve viscosity and stability characteristics.

U.S. Patent, 4,454,049, MacGiip, et al., issued June 12, 1984, discloses concentrated liquid textile treatment compositions in the form of isotropic solutions comprising water-insoluble di-C₁₆-C₂₄ optionally hydroxy-substituted alkyl, alkaryl or alkenyl cationic fabric softeners, at least about 70% of the fabric
10 softener consisting of one or more components together having a melting completion temperature of less than about 20 °C, a water-insoluble nonionic extender, especially C₁₀-C₄₀ hydrocarbons or esters of mono- or polyhydric alcohols with C₈-C₂₄ fatty acids, and a water-miscible organic solvent. The concentrates have improved formulation stability and dispersibility, combined with excellent fabric softening characteristics.

U.S. Patent 4,439,330, Ooms, issued March 27, 1984, teaches concentrated fabric softeners comprising
15 ethoxylated amines.

U.S. Patent 4,476,031, Ooms, issued October 9, 1984, teaches ethoxylated amines or protonated derivatives thereof, in combination with ammonium, imidazolinium, and like materials. The use of alkoxylated amines, as a class, in softener compositions is known (see, for example, German Patent Applications 2,829,022, Jakobi and Schmadel, published January 10, 1980, and 1,61 9,043, Mueller et al., published
20 October 30, 1969, and U.S. Patents 4,076,632, Davis, issued February 28, 1978, and 4,157,307, Jaeger and Davis, issued June 5, 1979).

U.S. Patent 4,422,949, Ooms, issued December 27, 1983, relates to softener concentrates based on ditallow dimethyl ammonium chloride (DTDMAC), glycerol monostearate and polycationics.

In United Kingdom Application 2,007,734A, Sherman et al., published May 23, 1979, fabric softener
25 concentrates are disclosed which contain a mixture of fatty quaternary ammonium salts having at least one C₈-C₃₀ alkyl substituent and an oil or substantially water-insoluble compound having oily/fatty properties. The concentrates are said to be easily dispersed/emulsified in cold water to form fabric softening compositions.

Concentrated dispersions of softener material can be prepared as described in European Patent
30 Application 406 and United Kingdom Patent Specification 1,601,360, Goffinet, published October 28, 1981, by incorporating certain nonionic adjunct softening materials therein.


As can be seen, the various solutions to the specific problem of preparing fabric softening compositions in concentrated form suitable for consumer use have not been entirely satisfactory. It is generally known (for
35 example, in U.S. Patent No. 3,681,241, Rudy, issued August 1, 1972) that the presence of ionizable salts in softener compositions does help reduce viscosity, but this approach is ineffective in compositions containing more than about 12% of dispersed softener, inasmuch as the level of ionizable salts necessary to reduce viscosity to any substantial degree has a seriously detrimental effect on product stability.

It has now been discovered that fabric softener compositions, especially concentrated compositions, containing the specific quaternized hydroxypropyl monoester ammonium salts of the present invention
40 possess desirable product stability and viscosity characteristics. Moreover, neither the use of these specific compounds in laundry fabric softening compositions, nor the desirable fabric softener/viscosity/stability/biodegradability properties of fabric softening compositions containing these compounds, including concentrates, appear to have been appreciated heretofore.

SUMMARY OF THE INVENTION

The present invention relates to a shelf-stable/biodegradable fabric softening composition comprising:

50 (a) from about 1% to about 20% by weight of a quaternized ester-ammonium softening compound having the formula



and mixtures thereof, wherein each R substituent is independently selected from C₁-C₆ alkyl, alkenyl or hydroxyalkyl groups, R¹ is a C₁₄-C₂₂ hydrocarbyl group, R² is a C₁₃-C₂₁ hydrocarbyl group, and A⁻ is a softener compatible anion; and

(b) from about 60% to about 98% of a liquid carrier, e.g., water, preferably a mixture of a C₁-C₄ monohydric alcohol and water.

While not intending to be limited by theory, it is believed that the ester moiety lends biodegradability to these compounds, whereas the fact that only a single ester group is present provides sufficient hydrolytic stability that the compounds can be stably formulated as liquid compositions, under the conditions disclosed hereinafter. The desirable viscosity characteristics of the compounds which allows them to be formulated as concentrates are unexpected. Moreover, since the compounds are cationic, they provide not only fiber and fabric softness, but also anti-static benefits.

The liquid compositions of the present invention are preferably formulated at a pH of from about 2.0 to about 5.0 to provide good storage stability.

The preferred liquid compositions herein have the softening compound present as particles dispersed in the liquid carrier. The particles are preferably sub-micron size, generally having average diameters in the range of about 0.10-0.50 microns. Such particle dispersions can optionally be stabilized against settling by means of standard non-base emulsifiers, especially nonionic extenders.

Importantly, the liquid compositions herein are substantially free (generally, less than about 1%) of free (i.e., unprotonated) amines, since free amines can catalyze decomposition of the quaternized ester-ammonium softening compounds, on storage. If minor amounts of amines are present, they should be protonated with acid during the formulation of the compositions. Strong acids, such as H₃PO₄ and HCl, can be used for this purpose.

The low viscosities exhibited by dispersions of particles of the softening compounds described herein allow them to be formulated as water-dilutable fabric softener "high concentrates" which contain from about 11% to about 20% by weight of the fabric softener compound. Such high concentrates may be conveniently packaged in pouches, which can be diluted with water by the user to produce "single-strength" softeners (typically, 3-8% concentration of softener active).

The compounds herein can also be formulated as solids, for example, in combination with particulate carriers as particulate fabric softening and antistatic compositions. When formulated as solids, the pH and presence or absence of amines are, of course, not as critical as with the liquid compositions, since stability to hydrolysis on storage is not so problematic.

Other solid compositions herein have the compounds releasably affixed to sheet materials to provide fabric softening and antistatic compositions in sheet form which can be used in hot air clothes dryers.

The invention also encompasses a method of softening fibers (including hair) or fabrics, or imparting an antistatic finish thereto, comprising contacting said fibers or fabrics with a composition of the above-disclosed type.


All percentages, ratios and proportions herein are by weight, unless otherwise specified.

DETAILED DESCRIPTION OF THE INVENTION

The compositions of the present invention comprise a mixture of a quaternary ester-ammonium fabric softening compound and a liquid carrier.

Quaternized Ester-Ammonium Softening Compound

The present invention contains as an essential component from about 1% to about 20%, preferably from about 2% to about 10%, of a quaternized ester-ammonium softening compound having the formula



The reaction mixture is cooled to room temperature, and a white precipitate is formed. The solid material is collected on a Whatman @ #1 filter paper (using a Buchi funnel apparatus) and is subsequently recrystallized from hot (60° C) isopropanol. The solid material is dried under vacuum (0.2 mm Hg) for 24 hours.

5

ANALYSIS

- 10 TLC (thin layer chromatography): 10x20 cm glass plate, 250 micron silica gel; solvent system, chloroform:methanol:water (15:6:0.6; v/v/v); visualization, 5% phosphomolybdic acid in ethanol; R_f = 0.61.
 IR (CCl₄): 3140, 2920, 2850, 1958, 1724, 1525, 1464, 1210, 1170 cm⁻¹.
¹H NMR (CDCl₃): δ6.02 (1H), 4.6-4.4 (1H), 4.3-4.0 (2H), 3.7-3.3 (10H), 2.3 (2H), 1.8-1.4 (4H), 1.2 (58H), 0.8 (6H) ppm (relative to tetramethylsilane).
 15 ¹³C NMR (CDCl₃): δ173.4, 66.4, 66.0, 65.9, 63.5, 52.5, 52.4, 34.3, 31.9, 29.7, 29.5, 29.3, 29.2, 26.6, 25.0, 22.7, 22.6, 14.1 ppm (relative to tetramethylsilane).

Liquid Carrier

20

- The compositions herein comprise a liquid carrier, e.g., water, preferably a mixture of water and a C₁-C₄ monohydric alcohol (e.g., ethanol, propanol, isopropanol, butanol, and mixtures thereof), isopropanol being preferred. These compositions comprise from about 60% to about 98%, preferably from about 70% to about 95%, of the liquid carrier. Preferably, the amount of the C₁-C₄ monohydric alcohol in the liquid
 25 carrier is from about 5% to about 50% by weight of the quaternized ester-ammonium softening compound, the balance of the liquid carrier being water.

- The softening compounds used in this invention are insoluble in such water-based carriers and, thus, are present as a dispersion of fine particles therein. These particles are sub-micron, preferably having average diameters of from about 0.1 to about 0.5 microns, in size and are conveniently prepared by high-
 30 shear mixing which disperses the compounds as fine particles. A method of preparation of a preferred dispersion is disclosed in detail in Examples I-IV hereinafter. Again, since the softening compounds are hydrolytically labile, care should be taken to avoid the presence of base, and to keep the processing temperatures and pH within the ranges specified herein.

- The particulate dispersions of the foregoing type can optionally be stabilized against settling by means
 35 of standard non-base emulsifiers, especially nonionic extenders. Such nonionics and their usage levels, have been disclosed in U.S. Patent 4,454,049, MacGilp, et al., issued June 12, 1984, the disclosure of which is incorporated herein by reference.

- Specific examples of nonionic extenders suitable for use in the compositions herein include glycerol esters (preferably glycerol monostearate), fatty alcohols (e.g., stearyl alcohol), and ethoxylated linear
 40 alcohols (preferably Neodol 23-3 - the condensation product of C₁₂-C₁₃ linear alcohol with 3 moles ethylene oxide, marketed by Shell Chemical Company) and mixtures thereof. Mixtures of glycerol monostearate and Neodol 23-3 are particularly preferred. The nonionic, if used, is typically used at a level of from about 0.1% to about 10% by weight of the composition.

45

Optional Ingredients


- Fully-formulated fabric softening compositions may optionally contain, in addition to the rapidly biodegradable quaternary 2-hydroxypropyl monoester ammonium compounds of the formula herein, and
 50 liquid carrier, one or more of the following ingredients.

Conventional quaternary ammonium softening agents

- 55 The compositions of the present invention can further comprise a conventional di(higher alkyl) quaternary ammonium softening agent. The compositions herein can contain from 0% to about 25% (preferably from about 0.1% to about 10%) of the conventional di(higher alkyl)quaternary ammonium softening agent.


By "higher alkyl", as used in the context of the conventional quaternary ammonium salts herein, is meant alkyl groups having from about 8 to about 30 carbon atoms, preferably from about 11 to about 22 carbon atoms. Examples of such conventional quaternary ammonium salts include:

(i) acyclic quaternary ammonium salts having the formula:

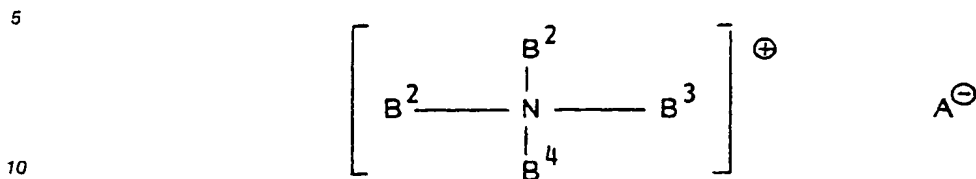


wherein B^2 is an acyclic aliphatic C_{15} - C_{22} hydrocarbon group, B^3 is a C_1 - C_4 saturated alkyl or hydroxyalkyl group, B^4 is selected from B^2 and B^3 , and A is an anion;

(ii) diamido quaternary ammonium salts having the formula:

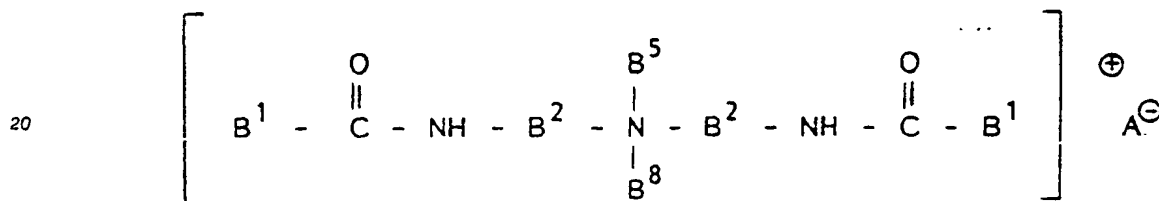


wherein B^1 is an acyclic aliphatic C_{15} - C_{22} hydrocarbon group, B^2 is a divalent alkylene group having 1 to 3 carbon atoms, B^5 and B^8 are C_1 - C_4 saturated alkyl or hydroxyalkyl groups, and A is an anion;

(iii) diamido alkoxylated quaternary ammonium salts having the formula:

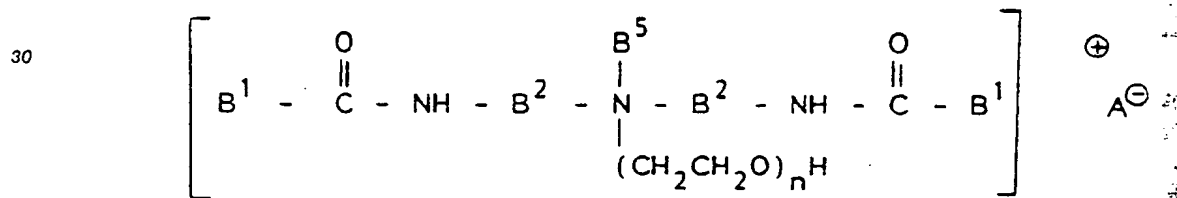

wherein n is equal to from about 1 to about 5, and B^1 , B^2 , B^5 and A are as defined above;

(iv) quaternary imidazolinium compounds having the formula:

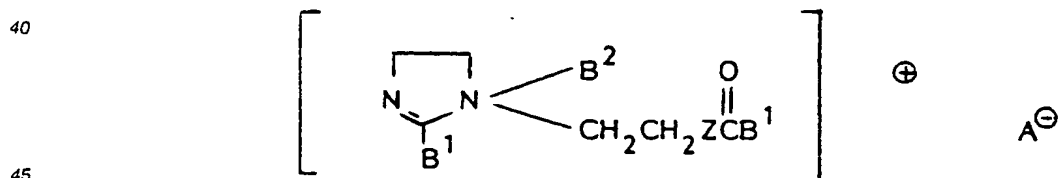

wherein B^1 = C_{15} - C_{17} saturated alkyl, B^2 = C_1 - C_4 saturated alkyl or H, Z = NH or O, and A is an anion.

Examples of Component (i) are the well-known dialkyldimethylammonium salts such as ditalowdimethylammonium chloride, ditalowdimethylammonium methylsulfate, di(hydrogenated tallow) dimethylammonium chloride, dibehenyl dimethylammonium chloride.

Examples of Components (ii) and (iii) are methylbis(tallowamidoethyl) (2-hydroxyethyl) ammonium methylsulfate and methylbis(hydrogenated tallowamidoethyl) (2-hydroxyethyl) ammonium methylsulfate, wherein B^1 is an acyclic aliphatic C_{15} - C_{17} hydrocarbon group, B^2 is an ethylene group, B^5 is a methyl group, B^8 is a hydroxyalkyl group and A is a methylsulfate anion; these materials are available from Sherex Chemical Company under the trade names Varisoft® 222 and Varisoft® 110, respectively.

Examples of Component (iv) are 1-methyl-1-tallowamino-ethyl-2-tallowimidazolinium methylsulfate and 1-methyl-1-(hydrogenated tallowamidoethyl)-methylsulfate.

Free amines


The liquid compositions herein should be substantially free (generally less than about 1%) of free (i.e., unprotonated) amines.

Minor amounts of protonated amines, typically from about 0.05% to about 1.0%, namely primary, secondary and tertiary amines having, at least, on straight-chain organic group of from about 12 to about 22 carbon atoms may be used in the compositions of the present invention to enhance dispersion stability. Preferred amines of this class are ethoxyamines, such as monotallow-dipolyethoxyamine, having a total of from about 2 to about 30 ethoxy groups per molecule. Also suitable are diamines such as tallow-N,N', N'-tris (2-hydroxyethyl)-1,3-propylenediamine, or C₁₅-C₁₈-alkyl-N-bis(2-hydroxyethyl)amines. Examples of the above compounds are those marketed under the trade names GENAMIN C, S, O and T, by Hoechst.

Care must be taken that if minor amounts of these amines are used to enhance the dispersion stability of the compositions, they are protonated with acid during formulation, otherwise the free amines may catalyze decomposition of the biodegradable quaternary ammonium compounds during storage.

Di-(higher alkyl) cyclic amine

The compositions herein optionally comprise from 0% to about 25% (preferably from about 0.1% to about 10%) by weight of the composition of a di(higher alkyl) cyclic amine fabric softening agent of the formula:

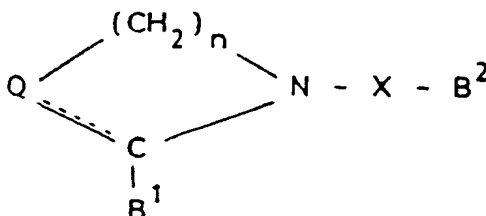

wherein n is 2 or 3, preferably 2; B¹ and B² are, independently, a C₈-C₃₀ alkyl or alkenyl, preferably C₁₁-C₂₂ alkyl, more preferably C₁₅-C₁₈ alkyl, or mixtures of such alkyl radicals. Examples of such mixtures are the alkyl radicals obtained from coconut oil, "soft" (non-hardened) tallow, and hardened tallow. Q is CH or N, preferably N. X is B⁴ - T - C(=O) -

wherein T is O or NB⁵, B⁵ being H or C₁-C₄ alkyl, preferably H, and B⁴ is a divalent C₁-C₃ alkylene group or (C₂H₄O)_m, wherein m is from about 1 to about 8.

Silicone Component

The fabric softening compositions herein optionally contain an aqueous emulsion of a predominantly linear polydialkyl or alkyl aryl siloxane in which the alkyl groups can have from one to five carbon atoms and may be wholly or partially fluorinated. These siloxanes act to provide improved fabric feel benefits. Suitable silicones are polydimethyl siloxanes having a viscosity, at 25° C, of from about 100 to about 100,000 centistokes, preferably from about 1,000 to about 12,000 centistokes.

It has been found that the ionic charge characteristics of the silicone as used in the present invention are important in determining both the extent of deposition and the evenness of distribution of the silicone and hence the properties of a fabric treated therewith.

Silicones having cationic character show an enhanced tendency to deposit. Silicones found to be of value in providing fabric feel benefits having a predominantly linear character and are preferably polydialkyl siloxanes in which the alkyl group is most commonly methyl. Such silicone polymers are frequently manufactured commercially by emulsion polymerization using a strong acid or strong alkali catalyst in the presence of a nonionic or mixed nonionic anionic emulsifier system. In addition to providing improved fabric feel benefits, the silicone components also improve the water absorbency of the fabrics treated with the softening compositions herein.

The optional silicone component embraces a silicone of cationic character which is defined as being

one of:

(a) a predominantly linear di-C₁-C₅ alkyl or C₁-C₅ alkyl aryl siloxane, prepared by emulsion polymerization using a cationic or nonionic surfactant as emulsifier;

(b) an alpha-omega-di-quaternized di-C₁-C₅ alkyl or C₁-C₅ alkyl aryl siloxane polymer; or

5 (c) an amino-functional di-C₁-C₅ alkyl or alkyl aryl siloxane polymer in which the amino group may be substituted and may be quaternized and in which the degree of substitution (d.s.) lies in the range of from about 0.0001 to about 0.1, preferably from about 0.01 to about 0.075 provided that the viscosity at 25 °C of the silicone is from about 100 to about 100,000 cs.

10 The fabric softening compositions herein may contain up to about 15%, preferably from about 0.1% to about 10%, of the silicone component.

Thickening Agent

15 Optionally, the compositions herein contain from 0% to about 3%, preferably from about 0.01% to about 2%, of a thickening agent. Examples of suitable thickening agents include: cellulose derivatives, synthetic high molecular weight polymers (e.g., carboxyvinyl polymer and polyvinyl alcohol), and cationic guar gums.

20 The cellulosic derivatives that are functional as thickening agents herein may be characterized as certain hydroxyethers of cellulose, such as Methocel®, marketed by Dow Chemicals, Inc.; also, certain cationic cellulose ether derivatives, such as Polymer JR-125®, JR-400®, and JR-30M®, marketed by Union Carbide.

Other effective thickening agents are cationic guar gums, such as Jaguar Plus®, marketed by Stein Hall, and Gendrive 458®, marketed by General Mills.

25 Preferred thickening agents herein are selected from the group consisting of methyl cellulose, hydroxypropyl methylcellulose, hydroxybutyl methylcellulose, or mixtures thereof, said cellulosic polymer having a viscosity in 2% aqueous solution at 20 °C of from about 15 to about 75,000 centipoise.

30 Soil Release Agent


Optionally, the compositions herein contain from 0% to about 10%, preferably from about 0.2% to about 5%, of a soil release agent. Preferably, such a soil release agent is a polymer. Polymeric soil release agents useful in the present invention include copolymeric blocks of terephthalate and polyethylene oxide 35 or polypropylene oxide, and the like.

A preferred soil release agent is a copolymer having blocks of terephthalate and polyethylene oxide. More specifically, these polymers are comprised of repeating units of ethylene terephthalate and polyethylene oxide terephthalate at a molar ratio of ethylene terephthalate units to polyethylene oxide terephthalate units of from about 25:75 to about 35:65, said polyethylene oxide terephthalate containing polyethylene 40 oxide blocks having molecular weights of from about 300 to about 2000. The molecular weight of this polymeric soil release agent is in the range of from about 5,000 to about 55,000.

Another preferred polymeric soil release agent is a crystallizable polyester with repeat units of ethylene terephthalate units containing from about 10% to about 15% by weight of ethylene terephthalate units together with from about 10% to about 50% by weight of polyoxyethylene terephthalate units, derived from 45 a polyoxyethylene glycol of average molecular weight of from about 300 to about 6,000, and the molar ratio of ethylene terephthalate units to polyoxyethylene terephthalate units in the crystallizable polymeric compound is between 2:1 and 6:1. Examples of this polymer include the commercially available materials Zelcon® 4780 (from Dupont) and Milease® T (from ICI).

Highly preferred soil release agents are polymers of the generic formula:

50



55

in which X can be any suitable capping group, with each X being selected from the group consisting of H, and alkyl or acyl groups containing from about 1 to about 4 carbon atoms. n is selected for water solubility and generally is from about 6 to about 113, preferably from about 20 to about 50. u is critical to formulation

in a liquid composition having a relatively high ionic strength. There should be very little material in which u is greater than 10. Furthermore, there should be at least 20%, preferably at least 40%, of material in which u ranges from about 3 to about 5.

The B^1 moieties are essentially 1,4-phenylene moieties. As used herein, the term "the B^1 moieties are essentially 1,4-phenylene moieties" refers to compounds where the B^1 moieties consist entirely of 1,4-phenylene moieties, or are partially substituted with other arylene or alkarylene moieties, alkylene moieties, alkenylene moieties, or mixtures thereof. Arylene and alkarylene moieties which can be partially substituted for 1,4-phenylene include 1,3-phenylene, 1,2-phenylene, 1,8-naphthylene, 1,4-naphthylene, 2,2-biphenylene, 4,4-biphenylene and mixtures thereof. Alkylene and alkenylene moieties which can be partially substituted include ethylene, 1,2-propylene, 1,4-butylene, 1,5-pentylene, 1,6-hexamethylene, 1,7-heptamethylene, 1,8-octamethylene, 1,4-cyclohexylene, and mixtures thereof.

For the B^1 moieties, the degree of partial substitution with moieties other than 1,4-phenylene should be such that the soil release properties of the compound are not adversely affected to any great extent. Generally, the degree of partial substitution which can be tolerated will depend upon the backbone length of the compound, i.e., longer backbones can have greater partial substitution for 1,4-phenylene moieties. Usually, compounds where the B^1 comprise from about 50% to about 100% 1,4-phenylene moieties (from 0 to about 50% moieties other than 1,4-phenylene) have adequate soil release activity. For example, polyesters made according to the present invention with a 40:60 mole ratio of isophthalic (1,3-phenylene) to terephthalic (1,4-phenylene) acid have adequate soil release activity. However, because most polyesters used in fiber making comprise ethylene terephthalate units, it is usually desirable to minimize the degree of partial substitution with moieties other than 1,4-phenylene for best soil release activity. Preferably, the B^1 moieties consist entirely of (i.e., comprise 100%) 1,4-phenylene moieties, i.e., each B^1 moiety is 1,4-phenylene.

For the B^2 moieties, suitable ethylene or substituted ethylene moieties include ethylene, 1,2-propylene, 1,2-butylene, 1,2-hexylene, 3-methoxy-1,2-propylene and mixtures thereof. Preferably, the B^2 moieties are essentially ethylene moieties, 1,2-propylene moieties or mixture thereof. Inclusion of a greater percentage of ethylene moieties tends to improve the soil release activity of compounds. Surprisingly, inclusion of a greater percentage of 1,2-propylene moieties tends to improve the water solubility of the compounds.

Therefore, the use of 1,2-propylene moieties or a similar branched equivalent is desirable for incorporation of any substantial part of the soil release component in the liquid fabric softener compositions. Preferably, from about 75% to about 100%, more preferably from about 90% to about 100%, of the B^2 moieties are 1,2-propylene moieties.

The value for each n is at least about 6, and preferably is at least about 10. The value for each n usually ranges from about 12 to about 113. Typically, the value for each n is in the range of from about 12 to about 43.

A more complete disclosure of these highly preferred soil release agents is contained in European Patent Application 185,427, Gosselink, published June 25, 1986, incorporated herein by reference.

40 Viscosity Control Agents

Viscosity control agents can be used in the compositions of the present invention (preferably in concentrated compositions). Examples of organic viscosity modifiers are fatty acids and esters, fatty alcohols, and water-miscible solvents such as short chain alcohols. Examples of inorganic viscosity control agents are water-soluble ionizable salts. A wide variety of ionizable salts can be used. Examples of suitable salts are the halides of the group IA and IIA metals of the Periodic Table of the Elements, e.g., calcium chloride, magnesium chloride, sodium chloride, potassium bromide, and lithium chloride. Calcium chloride is preferred. The ionizable salts are particularly useful during the process of mixing the ingredients to make the compositions herein, and later to obtain the desired viscosity. The amount of ionizable salts used depends on the amount of active ingredients used in the compositions and can be adjusted according to the desires of the formulator. Typical levels of salts used to control the composition viscosity are from about 20 to about 3,000 parts per million (ppm), preferably from about 20 to about 2,000 ppm, by weight of the composition.

55 Bactericides

Examples of bactericides used in the compositions of this invention include glutaraldehyde, formal-

dehyde, 2-bromo-2-nitropropane-1,3-diol sold by Inolex Chemicals under the trade name Bronopol®, and a mixture of 5-chloro-2-methyl-4-isothiazolin-3-one and 2-methyl-4-isothiazoline-3-one sold by Rohm and Haas Company under the trade name Kathon® CG/ICP. Typical levels of bacteriocides used in the present compositions are from about 1 to about 1,000 ppm by weight of the composition.

5

Other Optional Ingredients

The present invention can include other optional components conventionally used in textile treatment compositions, for example, colorants, perfumes, preservatives, optical brighteners, opacifiers, fabric conditioning agents, surfactants, stabilizers such as guar gum and polyethylene glycol, anti-shrinkage agents, anti-wrinkle agents, fabric crisping agents, spotting agents, germicides, fungicides, anti-oxidants such as butylated hydroxy toluene, anti-corrosion agents, and the like.

In the method aspect of this invention, fabrics or fibers (including hair) are contacted with an effective amount, generally from about 20 ml to about 300 ml (per 3.5 kg of fiber or fabric being treated), of the compositions herein in an aqueous bath. Of course, the amount used is based upon the judgment of the user, depending on concentration of the composition, fiber or fabric type, degree of softness desired, and the like. Typically, about 120 mls. of a 5% dispersion of the softening compounds are used in a 25 l laundry rinse bath to soften and provide antistatic benefits to a 3.5 kg load of mixed fabrics. Preferably, the rinse bath contains from about 25 ppm to about 100 ppm of the fabric softening compositions herein.

Solid carrier materials can be used in place of liquids. For example, the softener compounds herein can be absorbed on particulate solids such as potassium sulfate, micronized silica, powdered urea, and the like, and added to a laundry rinse bath. Alternatively, the softeners can be releasably padded onto a sheet (e.g., paper toweling, nonwoven fabric, or the like) and tumbled with damp fabrics in a hot-air clothes dryer, in the manner of the BOUNCE® brand dryer-added product known in commercial practice. Generally, such solid-form compositions will comprise from about 1% to about 20% of the quaternized ester-ammonium softening compound, and from about 75% to about 99% of the solid carrier.

The following examples illustrate the practice of the present invention but are not intended to be limiting thereof.

30

EXAMPLE I

A storage stable biodegradable fabric softening composition of the present invention is made as follows:

<u>Ingredient</u>	<u>Percent (wt.)</u>
$(\text{CH}_3)_2\text{-}\overset{+}{\underset{\text{C}_{18}\text{H}_{37}}{\text{N}}}\text{-CH}_2\text{-}\overset{\text{OH}}{\underset{ }{\text{CH}}}\text{-CH}_2\text{-}\overset{\text{O}}{\underset{\parallel}{\text{C}}}\text{-C}_{17}\text{H}_{35}\text{Cl}^-$	5.0%
Isopropanol	1.0%
Bronopol	0.01%
Dye	20 ppm
0.1 N HCl	0.25%
Water	Balance

50

20 g of the biodegradable monoester ammonium softener compound and 5 g of isopropanol are mixed and heated to 80° C to form a fluidized "melt". The molten mixture is then poured into a 400 g water seat with high shear mixing. The water is preheated to 70° C, and 20 ppm blue dye and 100 ppm bronopol are added to the water prior to mixing. About 1 g of isopropanol is evaporated from the molten mixture before it is poured into the water. The dispersion is mixed for 25 minutes at 7000 rpm (Tekmar high shear mixer). During mixing the temperature of the dispersion is maintained within 70-75° C by a cooling water bath. The pH is adjusted by the addition of 1 ml of 0.1 N HCl. The resulting dispersion has a viscosity of 50

centipoise (at 25°C), a pH of 3.5, and contains less than 1% of free (i.e., unprotonated) amines. The average particle size in the dispersion is 0.20 microns.

EXAMPLE II

A storage stable biodegradable fabric softening composition of the present invention is made as follows:

Ingredient	Percent (wt.)
$ \begin{array}{c} \text{OH} \quad \quad \text{O} \\ \quad \quad \\ (\text{CH}_3)_2\text{N}^+-\text{CH}_2-\text{CH}-\text{CH}_2-\text{OC}-\text{C}_{17}\text{H}_{35}\text{Cl}^- \\ \\ \text{C}_{18}\text{H}_{37} \end{array} $	5.0%
Isopropanol	1.1%
Glyceryl Monostearate (GMS)	1%
Neodol 23-3	1%
0.1 N HCl	0.25%
Water	Balance

20 g of the biodegradable monoester ammonium softener compound and 5 g of isopropanol are mixed and heated to 60°C to form a fluidized "melt". 4 g of GMS and 4 g of Neodol 23-3 are then added to the melt to form a homogeneous molten mixture. The molten mixture is then poured into a 365 g water seat with high shear mixing. The water is preheated to 50°C. 0.6 g of isopropanol is evaporated from the molten mixture before it is poured into the water. The dispersion is mixed for 20 minutes at 7200 rpm (Tekmar high shear mixer). The pH is adjusted by the addition of 1 ml of 0.1 N HCl. The resulting dispersion has a viscosity of 48 centipoise (at 25°C), a pH of 3.5, and contains less than 1% of free (i.e., unprotonated) amines. The average particle size is 0.17 micron.

EXAMPLE III

A storage stable biodegradable fabric softening composition of the present invention is made as follows:

Ingredient	Percent (wt.)
$ \begin{array}{c} \text{OH} \quad \quad \text{O} \\ \quad \quad \\ (\text{CH}_3)_2\text{N}^+-\text{CH}_2-\text{CH}-\text{CH}_2-\text{OC}-\text{C}_{17}\text{H}_{35}\text{Cl}^- \\ \\ \text{C}_{18}\text{H}_{37} \end{array} $	4.5%
Isopropanol	0.6%
Glyceryl Monostearate (GMS)	1.2%
Neodol 23-3	0.3%
Polydimethylsiloxane (PDMS)	0.1%
0.1 N HCl	0.25%
Water	Balance

18 g of the biodegradable monoester ammonium softener compound and 2.4 g of isopropanol are mixed and heated to 70°C to form a fluidized "melt". 4.8 g of GMS and 1.2 g of Neodol 23-3 are then

added to the melt to form a homogeneous molten mixture. The molten mixture is then poured into a 375 g water seat with high shear mixing. The water is preheated to 65° C. The dispersion is mixed for 15 minutes at 7000 rpm (Tekmar high shear mixer). After the dispersion cools down to about 30° C, 0.4 g of PDMS is added to the dispersion with low shear mixing (3000 rpm for 3 minutes). The pH is adjusted by the addition of 1 ml of 0.1 N HCl. The resulting dispersion has a viscosity of 88 centipoise (at 25° C), a pH of 3.9, and contains less than 1% free (i.e., unprotonated) amines. The average particle size in the dispersion is 0.19 microns.

EXAMPLE IV

A storage stable biodegradable concentrated fabric softening composition of the present invention is made as follows:

<u>Ingredient</u>	<u>Percent (wt.)</u>
$ \begin{array}{c} \text{OH} \quad \quad \text{O} \\ \quad \quad \\ (\text{CH}_3)_2\text{N}^+-\text{CH}_2-\text{CH}-\text{CH}_2-\text{OC}-\text{C}_{17}\text{H}_{35}\text{Cl}^- \\ \\ \text{C}_{18}\text{H}_{37} \end{array} $	15.0%
Isopropanol	2.5%
Glycerol Monostearate (GMS)	1.0%
Neodol 23-3	0.5%
CaCl ₂	0.06%
0.1 N HCl	0.25%
Water	Balance

30 g of the biodegradable monoester ammonium softener compound and 5 g of isopropanol are mixed and heated to 75° C to form a fluidized melt. 2 g of GMS and 1 g of Neodol 23-3 are then added to the melt to form a homogeneous molten mixture. The melt is then poured into a 165 g water seat with high shear mixing. The water is preheated to 60° C. The dispersion is mixed for 15 minutes at 7000 rpm (Tekmar high shear mixer). 6 ml of 2% CaCl₂ aqueous solution is added to the dispersion during mixing to prevent the dispersion from gelling. During mixing the dispersion's temperature is maintained at about 60° C. The pH is adjusted by the addition of 0.5 ml of 0.1 N HCl. The resulting dispersion has a viscosity of 210 centipoise (at 25° C), a pH of 3.8, and contains less than 1% free (i.e., unprotonated) amines. The average particle size in the dispersion is 0.26 microns.

In a convenient mode, this concentrated composition is packaged in a simple plastic pouch, which is opened and poured into 4X its volume of water prior to use to prepare a "single strength" softener composition, thereby saving on packaging and shipping costs, as well as storage space.

Typically, the liquid fabric softening compositions in the above examples are added to the rinse cycle of conventional washing machines. When multiple rinses are used, the fabric softening composition is preferably added to the final rinse. The amount added to the rinse cycle is generally from about 20 ml to about 300 ml (per 3.5 kg of fabric being treated) of the compositions of Examples I-III (and the diluted version of Example IV).

EXAMPLE V

The preparation of a fabric-softener sheet for use in a hot-air clothes dryer is as follows.

Fabric Conditioning
Composition Components

Percent (wt.)

5	$(\text{CH}_3)_2-\overset{\text{OH}}{\underset{\text{C}_{18}\text{H}_{37}}{\text{N}^+}}-\text{CH}_2-\overset{\text{O}}{\underset{\text{ }}{\text{CH}}}-\text{CH}_2-\text{OC}-\text{C}_{17}\text{H}_{35}\text{CH}_3\text{SO}_4^-$	46.0%
	Sorbitan Monostearate	46.0%
10	Clay	7.0%
	Perfume	1.0%
	<u>Dryer-added Sheet Substrate Composition</u>	
15	Rayon fibers	70.0%
	Polyvinyl acetate..	30.0%
	(10"x14" (25.4 cm x 35.6 cm) sheets, 1.4 gm)	

20

The biodegradable monoester ammonium softener compound, sorbitan monostearate, clay (Bentolite L, a montmorillonite clay, obtained from Southern Clay Products), and perfume are mixed and heated to 80°C to form a fluidized "melt". The substrate (made of the rayon fibers with polyvinyl acetate) is then coated with about 4 grams of the molten actives and dried overnight. This provides a weight ratio of fabric conditioning composition:dry substrate of approximately 3.

25

Following solidification of the fabric conditioning composition, the substrate is slit with a knife, said slits being in substantially parallel relationship and extending to within about 1 inch (2.5 cm) from at least one edge of said substrate. The width of an individual slit is approximately 0.2 inches (0.5 cm). These dryer added sheets are added to a clothes dryer together with damp fabrics to be treated (typically, one sheet per 3.5 kg load of fabrics, dry weight basis). The heat and tumbling action of the revolving dryer drums evenly distributes the composition over all fabrics, and dries the fabrics. Fabric softening and static control are provided to the fabrics in this manner.

30

In all of the above examples, substantially similar results are obtained when the biodegradable quaternary monoester ammonium softening compound is replaced, in whole or in part, with any of the following biodegradable monoester ammonium softening compounds:

35

$[\text{CH}_3]_2[\text{C}_{18}\text{H}_{37}]^{\oplus}\text{NCH}_2\text{CH}(\text{OH})\text{CH}_2\text{OC}(\text{O})\text{C}_{17}\text{H}_{35}\text{Br}^{\ominus}$
 $[\text{CH}_3]_2[\text{C}_{16}\text{H}_{33}]^{\oplus}\text{NCH}_2\text{CH}(\text{OH})\text{CH}_2\text{OC}(\text{O})\text{C}_{15}\text{H}_{31}\text{Cl}^{\ominus}$
 $[\text{C}_2\text{H}_5]_2[\text{C}_{18}\text{H}_{35}]^{\oplus}\text{NCH}_2\text{CH}(\text{OH})\text{CH}_2\text{OC}(\text{O})\text{C}_{15}\text{H}_{31}\text{Cl}^{\ominus}$
 $[\text{C}_2\text{H}_5][\text{CH}_3][\text{C}_{18}\text{H}_{37}]^{\oplus}\text{NCH}_2\text{CH}(\text{OH})\text{CH}_2\text{OC}(\text{O})\text{C}_{17}\text{H}_{35}\text{CH}_3\text{SO}_4^{\ominus}$
 $[\text{C}_3\text{H}_7][\text{C}_2\text{H}_5][\text{C}_{16}\text{H}_{33}]^{\oplus}\text{NCH}_2\text{CH}(\text{OH})\text{CH}_2\text{OC}(\text{O})\text{C}_{15}\text{H}_{31}\text{Cl}^{\ominus}$
 $[\text{iso-C}_3\text{H}_7][\text{CH}_3][\text{C}_{18}\text{H}_{37}]^{\oplus}\text{NCH}_2\text{CH}(\text{OH})\text{CH}_2\text{OC}(\text{O})\text{C}_{15}\text{H}_{31}\text{I}^{\ominus}$

40

Importantly, the above biodegradable liquid compositions (Examples I-IV) display excellent softening characteristics on both natural and synthetic fabrics, low viscosity at both normal and elevated temperatures, and good product stability and dispersibility.

45


Claims

1. A liquid fabric softening and antistatic composition comprising a quaternary ester-ammonium softening compound and a liquid carrier, characterized in that the composition contains:

50

(a) from 1% to 20%, preferably from 2% to 10%, by weight of a quaternized ester-ammonium softening compound having the formula

55

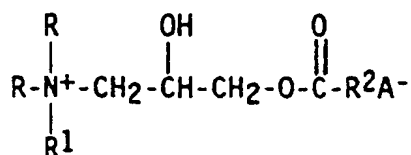


5

- and mixtures thereof, wherein each R substituent is independently selected from C₁-C₆ alkyl, alkenyl or hydroxyalkyl groups, R¹ is a C₁₄-C₂₂ hydrocarbyl group, R² is a C₁₃-C₂₁ hydrocarbyl group, and A⁻ is a softener compatible anion; and
- (b) from 60% to 98% of a liquid carrier.


2. A composition according to Claim 1 which is formulated at a pH of from 2.0 to 5.0.
3. A composition according to Claim 1 or Claim 2 wherein the liquid carrier consists of a mixture of a C₁-C₄ monohydric alcohol, or mixtures thereof, preferably isopropanol, together with water, the amount of monohydric alcohol being from 5% to 50% by weight of the softening compound.
4. A composition according to any one of Claims 1-3 wherein the softening compound is present as particles, preferably having an average diameter of from 0.1 to 0.5 micron, dispersed in the liquid carrier.
5. A composition according to any one of Claims 1-4 which is substantially free of unprotonated amines.
6. A composition according to any one of Claims 1-5 which additionally contains from 0.1% to 10% of a conventional di-(higher alkyl) quaternary ammonium softening agent.
7. A composition according to any one of Claims 1-6 which additionally contains from 0.1% to 10% by weight of a nonionic extender, preferably selected from the group consisting of glycerol esters, fatty alcohols, ethoxylated linear alcohols, and mixtures thereof.
8. A composition according to any one of Claims 1-7 wherein the quaternized ester-ammonium softening compound is

30

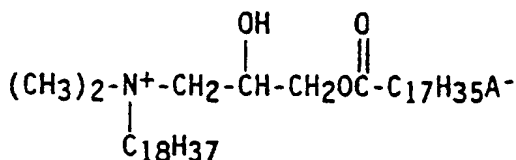

9. A composition according to any one of Claims 1-8 which is packaged in a pouch.
10. A composition according to any one of Claims 1-9 which additionally contains from 20 to 3,000 ppm of a salt selected from the group consisting of calcium chloride, magnesium chloride, sodium chloride, potassium chloride, lithium chloride, and mixtures thereof.
11. A method of softening and providing an antistatic finish to fabrics by contacting said fabrics with an effective amount of a composition according to any one of Claims 1-10.
12. A fabric softener and antistatic composition in solid form comprising a quaternary ester-ammonium softening compound and a solid carrier, characterized in that the composition contains:
 - (a) a solid carrier, preferably a sheet substrate; and
 - (b) from 1% to 20% by weight of a quaternized ester-ammonium softening compound having the formula

45

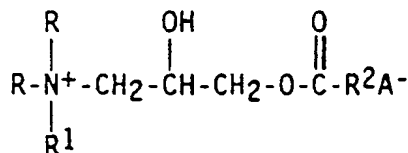

50

- and mixtures thereof, wherein each R substituent is independently selected from C₁-C₆ alkyl, alkenyl or hydroxyalkyl groups, R¹ is a C₁₄-C₂₂ hydrocarbyl group, R² is a C₁₃-C₂₁ hydrocarbyl group, and A⁻ is a softener compatible anion;
- said softener compound being releasably affixed to said solid carrier.

55

THIS PAGE BLANK (USPTO)

(19)



Europäisches Patentamt
European Patent Office
Office européen des brevets

(11) Publication number:

0 330 261
A3

(12)

EUROPEAN PATENT APPLICATION

(21) Application number: 89200355.9

(51) Int. Cl.⁵: **C11D 3/00, C11D 1/62,**
C07C 93/18, D06M 13/34,
D06M 13/46, C11D 3/20

(22) Date of filing: 15.02.89

(30) Priority: 25.02.88 US 160380

(43) Date of publication of application:
30.08.89 Bulletin 89/35

(84) Designated Contracting States:
AT BE CH DE FR GB IT LI LU NL

(88) Date of deferred publication of the search report:
27.12.90 Bulletin 90/52


(71) Applicant: **THE PROCTER & GAMBLE**
COMPANY
One Procter & Gamble Plaza
Cincinnati Ohio 45202(US)

(72) Inventor: **Hardy, Frederick Edward**
8 Woodend Darras Hall
Ponteland Northumberland NE20 9ES(GB)
Inventor: **Walley, Darlene Rose**
363 McAlpin
Cincinnati Ohio 45220(US)

(74) Representative: **Canonici, Jean-Jacques et al**
Procter & Gamble European Technical
Center N.V. Temselaan 100
B-1853 Strombeek-Bever(BE)

(54) **Stable biodegradable fabric softening compositions containing 2-hydroxypropyl monoester quaternized ammonium salts.**

(57) Shelf-stable biodegradable fabric softening compositions are provided comprising mixtures of a quaternized ester-ammonium softening compound having the formula



and mixtures thereof, wherein each R substituent is independently selected from C₁-C₆ alkyl, alkenyl or hydroxyalkyl groups, R¹ is a C₁₄-C₂₂ hydrocarbyl group, R² is a C₁₃-C₂₁ hydrocarbyl group, and A⁻ is a softener compatible anion; and a liquid carrier. These biodegradable compositions have improved product stability and dispersability, as well as excellent fabric softening characteristics.

EP 0 330 261 A3



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number

EP 89 20 0355

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int. Cl. 4)
P,A	EP-A-0 293 953 (THE PROCTER & GAMBLE) * the whole document *	1-5,7,9	C 11 D 3/00 C 11 D 1/62
Y	EP-A-0 239 910 (THE PROCTER & GAMBLE) * the whole document *	1,7	C 07 C 93/18 D 06 M 13/34
A	---	2-4,10	D 06 M 13/46 C 11 D 3/20
Y	DE-A-2 025 944 (HENKEL & CIE) * page 3, lines 16-28; page 4, lines 1-12; page 9, lines 21,22 *	1,7	
Y,D	US-A-3 872 138 (YUZURU OGATA) * column 1, lines 38-41; claims *	1	
Y	FR-A-2 130 652 (HENKEL & CIE) * claims 1-5 *	11,12	
Y	US-A-4 022 938 (W. NASSIF ZAKI et al.) * claims *	11,12	
D,A	US-A-3 272 712 (G. KALOPISSIS et al.) * the whole document *	1	TECHNICAL FIELDS SEARCHED (Int. Cl.4) C 11 D 3/00 C 11 D 1/00
The present search report has been drawn up for all claims			
Place of search BERLIN		Date of completion of the search 25-09-1990	Examiner PELLI-WABLAT B
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document			

EPO FORM 1503 03.82 (P0401)